


Delivery Premium Quality Fans Globally for Healthier Breathing

World's Largest Selection of Fan Products
World's Most Comprehensive Fan Solutions

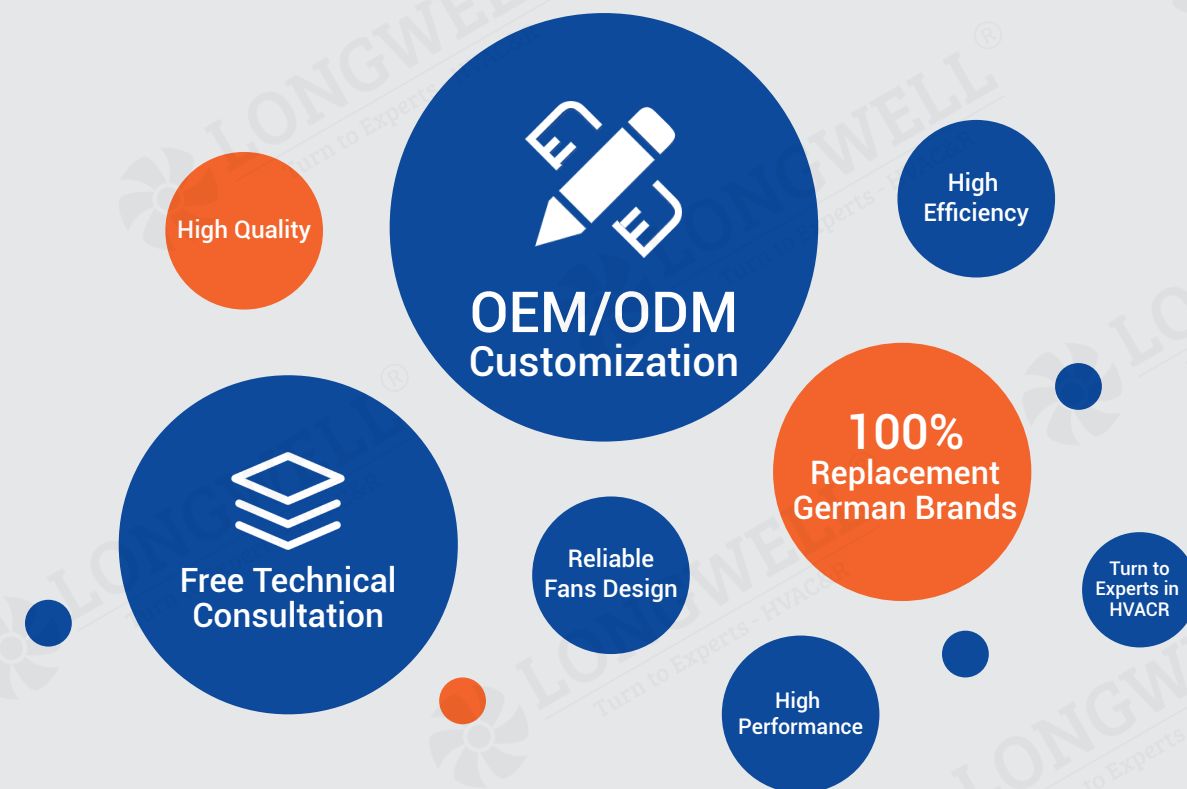

Ningbo Longwell Electric Technology Co., Ltd

Headquarter: NO.100, South of Xuxiang River, Yuyao, Zhejiang Province, China 315400

Tell: +86 574 6218 9863

Fax: +86 574 6218 9863

Phone: 0086 183 5827 4663

Web: www.longwellfans.com | www.longwell-group.com | www.longwell-media.com

Email: sales@zjlongwell.com



LONGWELL TECHNOLOGY

"Born for High-Quality Breathing
LONGWELL Fans Power Your Equipments"



**Professional Manufacturer
of HVACR Fan & Motors**


—— Air Conditioner Motor

Longwell Group

Longwell-China
Longwell-USA
Longwell-Russia
Longwell-Europe

CATALOGUE

01-02	About Longwell
03-04	Testing and Standards
05	Type Code
06-14	Air Conditioner Motor
15-16	Infrared Remote Control Panel Instructions

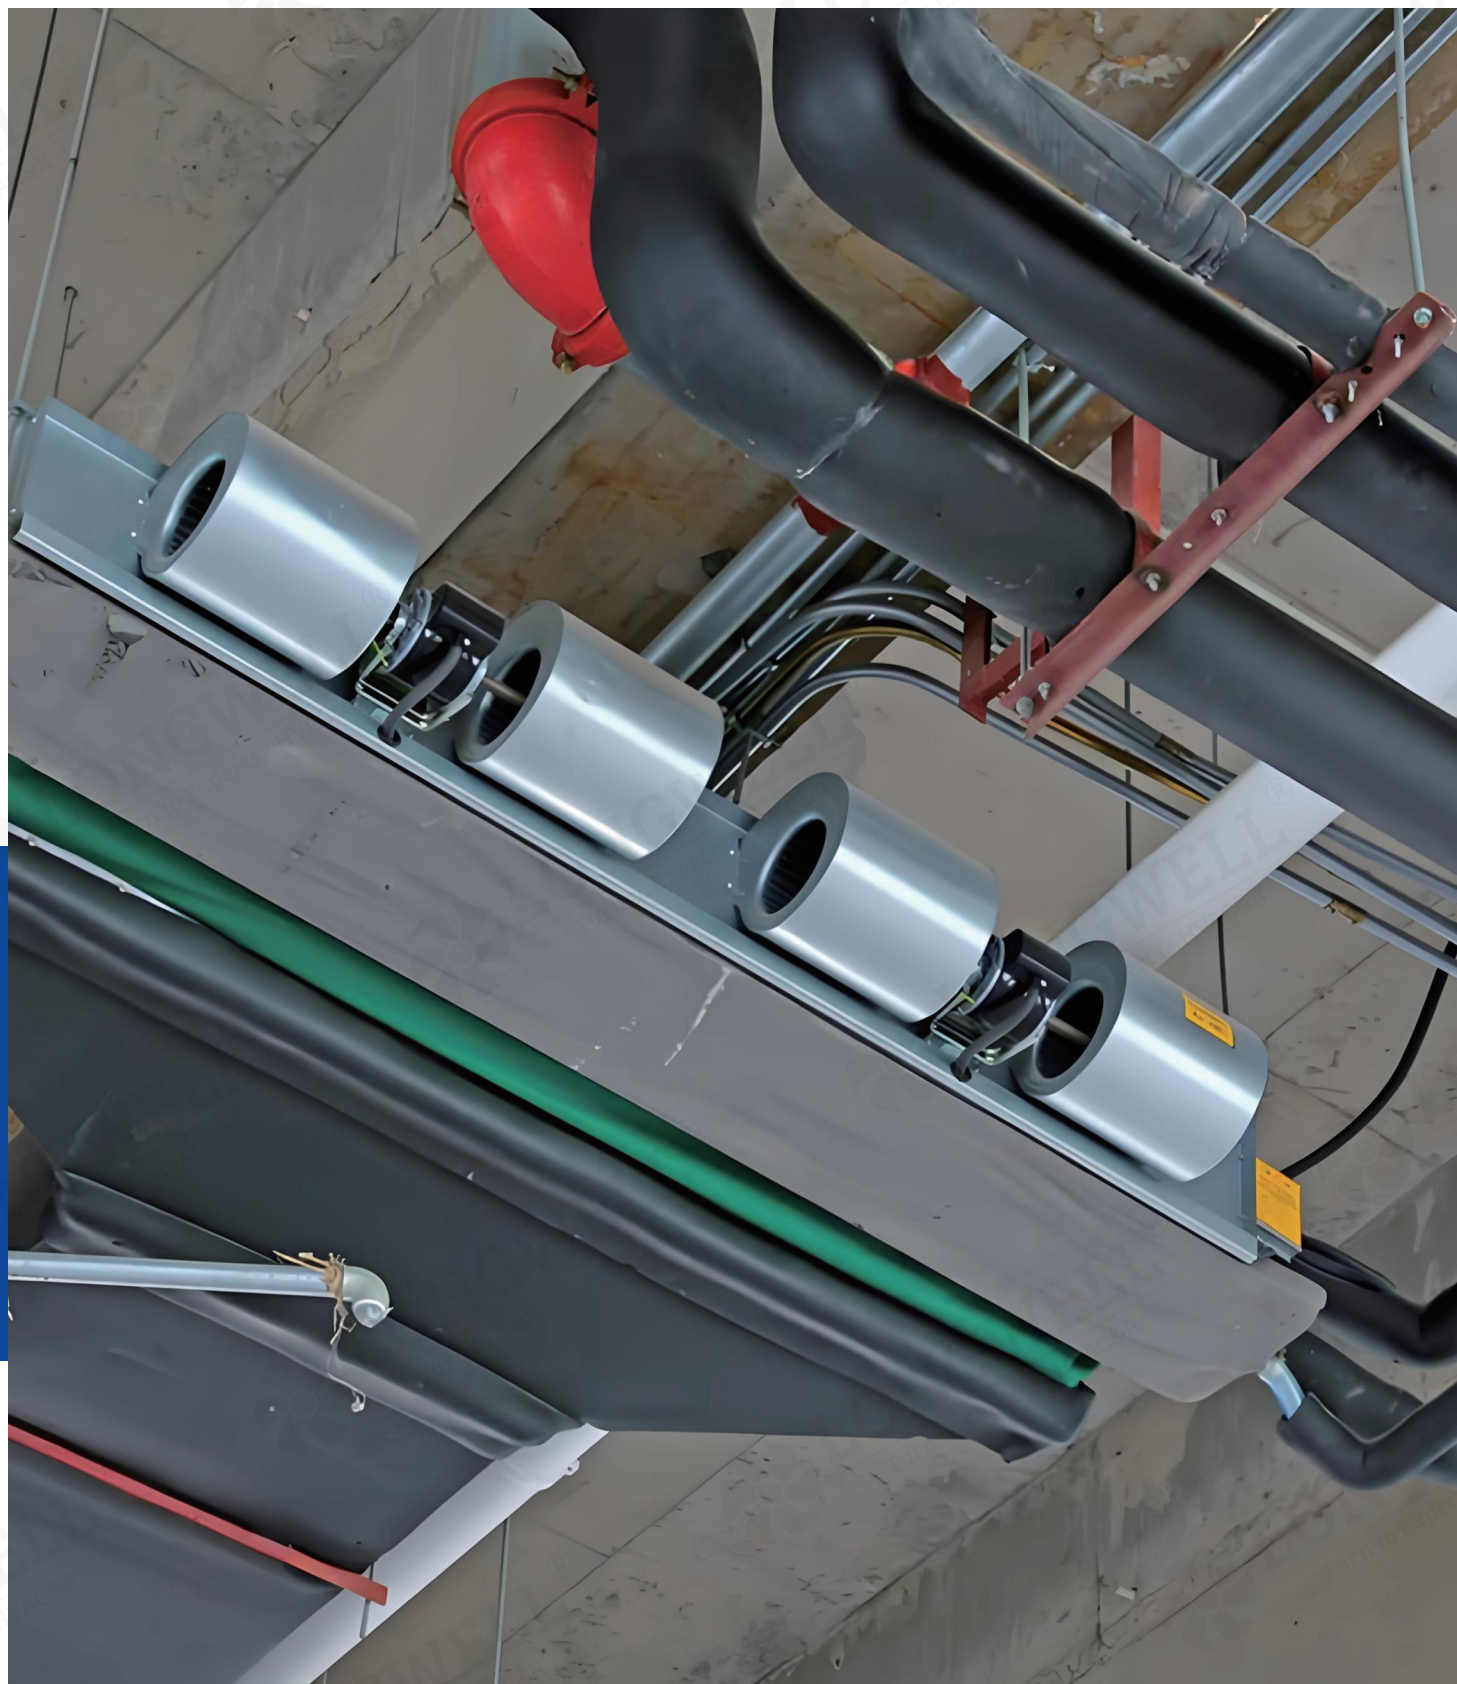

About Longwell

Born for High-Quality Breathing, LONGWELL Fans Power Your Equipment

OEM for Well-Known Brands

Supplies Fortune 500 Companies

Global Technical Support

LONGWELL is a leading fan manufacturer, specializing in high-quality fans, blowers, motors, and components for heating, ventilation, air conditioning, and refrigeration applications. We have a strong presence in delivery capabilities, design and R&D capabilities, as well as manufacturing, placing us at the forefront of the industry.

Our product range includes EC/DC/AC centrifugal fans, axial fans, AC/BLDC cross-flow fans, single/double forward curved fans, AC/BLDC/ECM motors, and industrial fan blowers. Since our establishment in 1990, we have continuously upgraded our facilities and production capacity, boasting advanced testing labs and production facilities with an annual capacity of millions of fans. With over 20 years of experience, we are highly skilled in the design, development, and manufacture of fans and motors. We export to over 30 countries and serve numerous Fortune 500 clients.

Our facilities and products are compliant with certifications such as ISO9001, ISO14001, BSCI, CE, UL/ETL, CCC, EMC, and LVD. These certifications demonstrate our compliance in quality management, environmental management, social responsibility, and product safety. We are quality-oriented and dedicated to providing products and services that meet international standards. 

Equipped with advanced testing labs and production facilities, including a B&K noise lab, CFD simulation lab, air dynamics test chambers, automatic welding machines, CNC machining centers, and auto robot injection machines, we ensure efficient production and on-time delivery.

As industry leaders, we prioritize technological innovation and efficiency. We employ advanced technologies such as aerodynamics principles and CFD simulation to ensure precise and efficient fan designs. Additionally, we offer customized services to design and manufacture fan systems according to specific customer requirements. Our focus is on providing high-tech, high-efficiency products that meet our customers' needs and contribute to a better future.

At LONGWELL, innovation is at the core of our operations, driving continuous improvement. With our extensive experience and expertise, we can quickly customize solutions that meet customer needs. We emphasize technological sophistication, utilizing advanced technologies and high-performance materials to deliver products that are efficient, safe, and reliable. Our brand is widely recognized globally, and we are committed to promoting sustainable development and advancing the efficient fan industry.

LONGWELL looks forward to collaborating with you and providing high-quality customized fan and motor solutions. Please feel free to contact us as we work together to create a brighter future.

193

Staff

40000m²

Floor Space

500⁺

Branding Clients

1Million⁺ PCS

Annual Outputs

6

Overseas Offices
on Spot Support

50⁺

Members
R&D Team




B&K Noise Testing Lab



Production Line



Automatic Welding

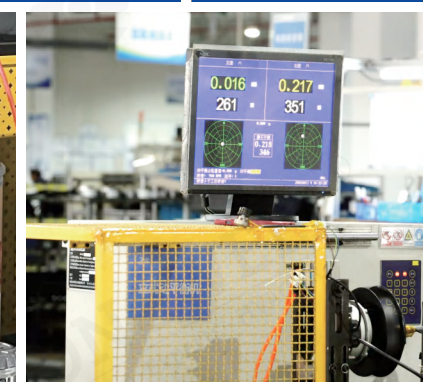

Balance Machine



Automatic Welding Machine




Production Line - Centrifugal Fan



Automatic CNC Machine



Air Dynamic Test Lab

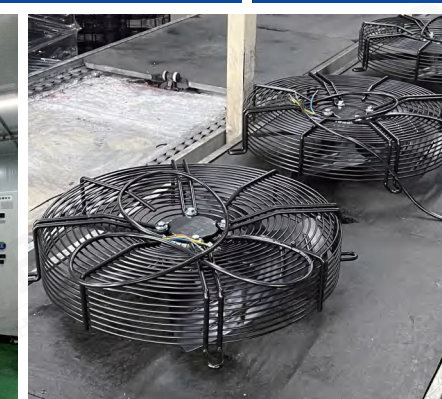

Production Line - Axial Fans



Production Line

Testing and Standards

- ISO GB/T 19001-2016 idt ISO 9001:2015/GB/T 24001-2016 idt ISO 14001:2015/GB/T 45001-2020 idt ISO 45001:2018
- UL 507:2017 Ed.10+R:27/CSA C22.2#113:2018 Ed.11
- BSCI ANSI C63.4:2014/ANSI C63.4a-2017
- EN IEC 55014-1:2021/EN IEC 55014-2:2021/EN IEC 61000-3-2:2019 +A1:2021
EN 61000-3-3:2013 +A1:2019 +A2:2021 +AC:2022-01
EN 60335-2-80:2003 +A1:2004 +A2:2009;
EN 60335-1:2012 +A11:2014 +A13:2017 +A1:2019+A14:2019 +A2:2019+A15:2021
EN 62321-1:2013/EN 62321-2:2014/EN 62321-3-1:2014
EN 62321-4:2014+A1:2017/EN 62321-5:2014/EN 62321-6:2015
EN 62321-7-1:2015/EN 62321-7-2:2017/EN 62321-8:2017




Enterprise Credit Evaluation Certificate - Highest Level in China




Own-Brand



Own-Brand

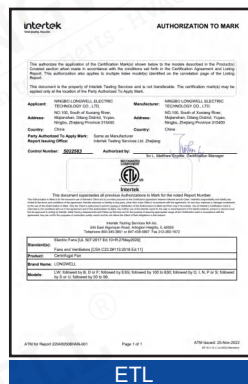


ETL

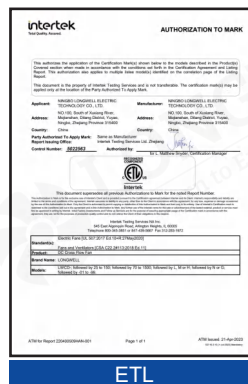

ETL



CE

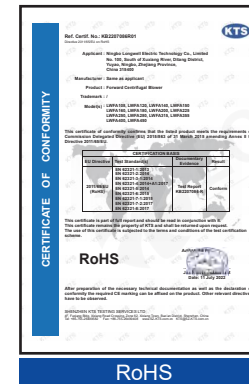

RoHS




CE




CE



CE

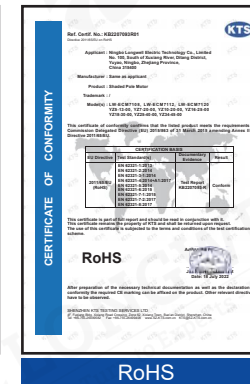


RoHS

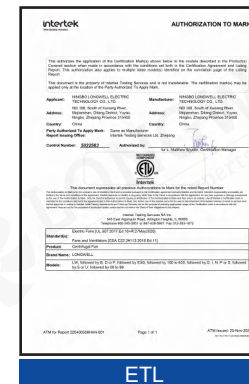


ETL



ETL

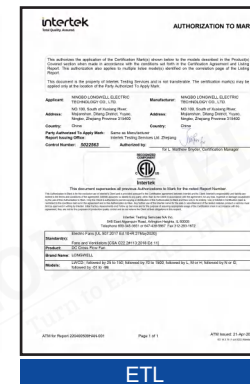

ETL

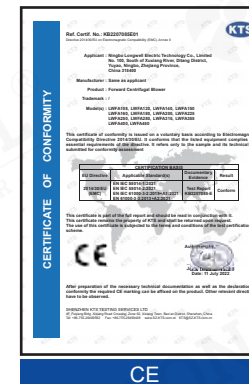

CE



CE



ISO 9001




ISO 9001




RoHS




RoHS

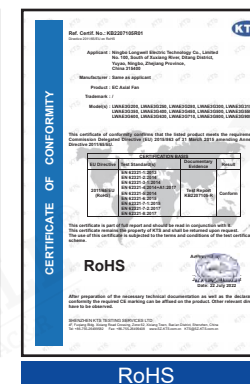

RoHS

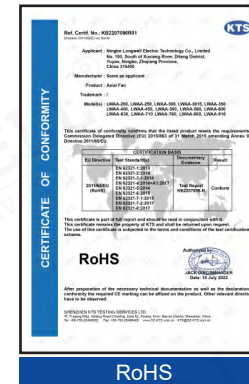

RoHS

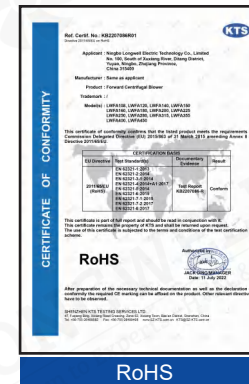

RoHS



CE



CE



CE

Type Code

LW Y DK 30 - 4P - 001

Series Number

Number of Pole

2P 4P 6P 8P 10P 12P

Rated Power(W)

Number of Shafts

DK-Single Shaft Extension

SK-Double Shaft Extension

Motor Type

Y-AC Capacitor Motor

BL-Brushless EC Motor

Longwell

Air Conditioner Motor

Professional HVAC Fan & Motors Manufacturer



110mm Air Conditioner Motor-Single Shaft


Product Characteristic

- Housing Material: Galvanized Sheet
- Insulation Class: B/F
- Protection Class: IP20/44



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Nominal Output Power (W)	Pole	Bracket Height (mm)	Line Length (mm)	Tube Length (mm)
LWYDK30-4P-001	220	50	30	4	95/100/105	1000	900
LWYDK40-4P-001	220	50	40	4	95/100/105	1200	1100
LWYDK50-4P-001	220	50	50	4	95/100/105	1300	1200
LWYDK60-4P-001	220	50	60	4	95/100/105	1500	1400
LWYDK80-4P-001	220	50	80	4	95/100/105	1500	1400
LWYDK100-4P-001	220	50	100	4	95/100/105	1800	1700
LWYDK120-4P-001	220	50	120	4	95/100/105	1800	1700

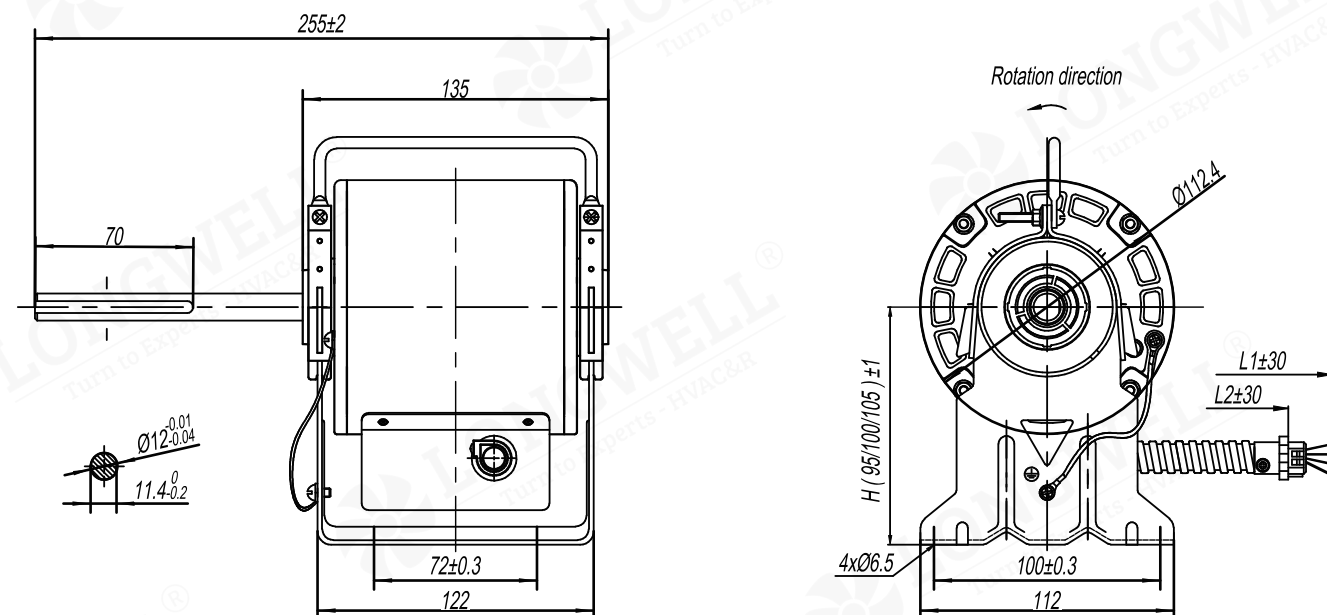

110mm Air Conditioner Motor-Double Shaft


Product Characteristic

- Housing Material: Galvanized Sheet
- Insulation Class: B/F
- Protection Class: IP20/44



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Nominal Output Power (W)	Pole	Bracket Height (mm)	Line Length (mm)	Tube Length (mm)
LWYSK30-4P-001	220	50	30	4	95/100/105	1000	900
LWYSK40-4P-001	220	50	40	4	95/100/105	1200	1100
LWYSK50-4P-001	220	50	50	4	95/100/105	1300	1200
LWYSK60-4P-001	220	50	60	4	95/100/105	1500	1400
LWYSK80-4P-001	220	50	80	4	95/100/105	1500	1400
LWYSK100-4P-001	220	50	100	4	95/100/105	1800	1700
LWYSK120-4P-001	220	50	120	4	95/100/105	1800	1700

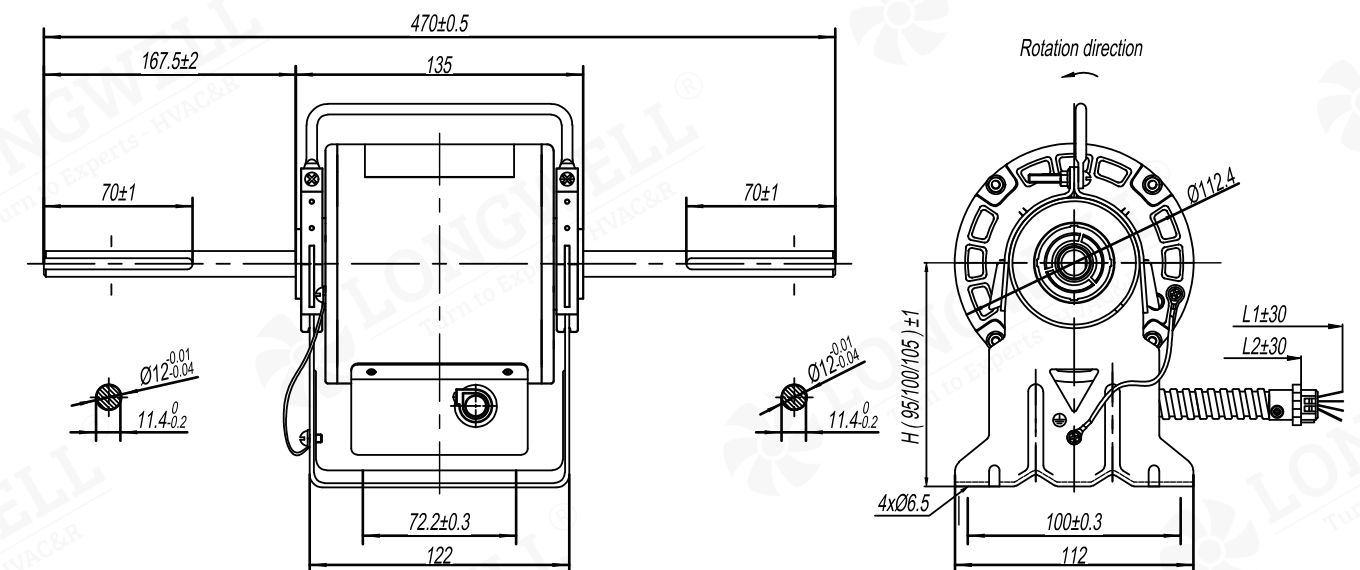

120mm Air Conditioner Motor-Single Shaft


Product Characteristic

- Housing Material: Galvanized Sheet
- Insulation Class: B/F
- Protection Class: IP20/44



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Nominal Output Power (W)	Pole	Bracket Height (mm)	Line Length (mm)	Tube Length (mm)
LWYDK125-4P-001	220	50	125	4	95/100/105	1000	900
LWYDK150-4P-001	220	50	150	4	95/100/105	1200	1100
LWYDK200-4P-001	220	50	200	4	95/100/105	1300	1200
LWYDK250-4P-001	220	50	250	4	95/100/105	1500	1400

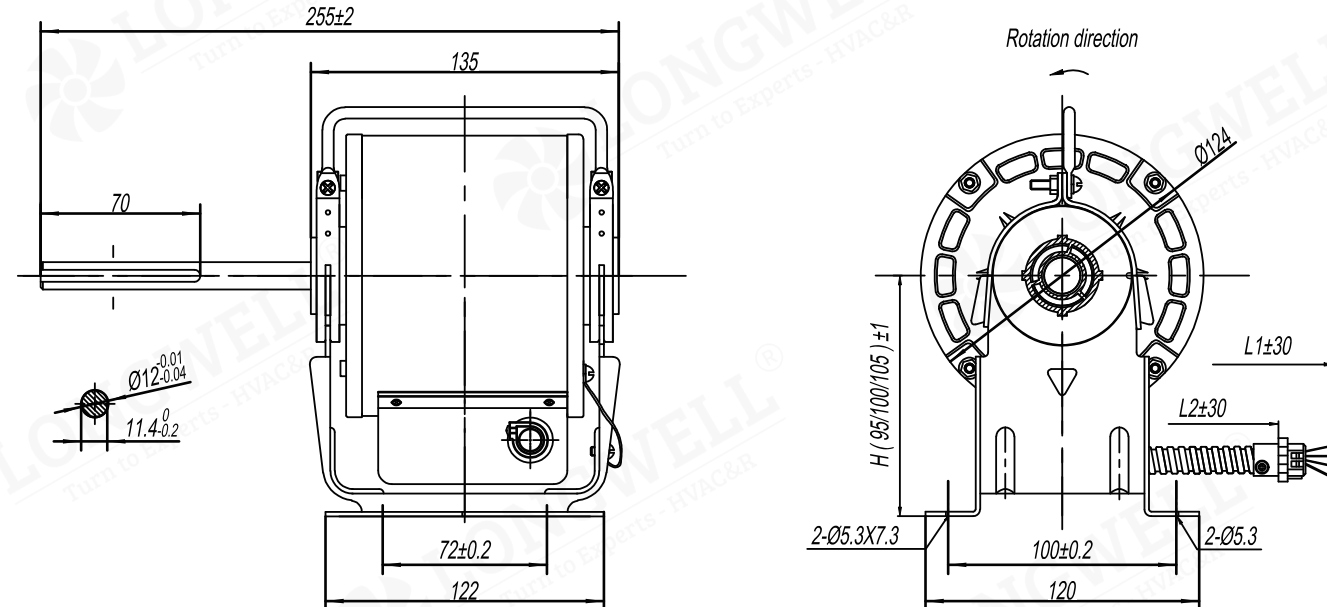

120mm Air Conditioner Motor-Double Shaft


Product Characteristic

- Housing Material: Galvanized Sheet
- Insulation Class: B/F
- Protection Class: IP20/44



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Nominal Output Power (W)	Pole	Bracket Height (mm)	Line Length (mm)	Tube Length (mm)
LWYSK125-4P-001	220	50	125	4	95/100/105	1000	900
LWYSK150-4P-001	220	50	150	4	95/100/105	1200	1100
LWYSK200-4P-001	220	50	200	4	95/100/105	1300	1200
LWYSK250-4P-001	220	50	250	4	95/100/105	1500	1400

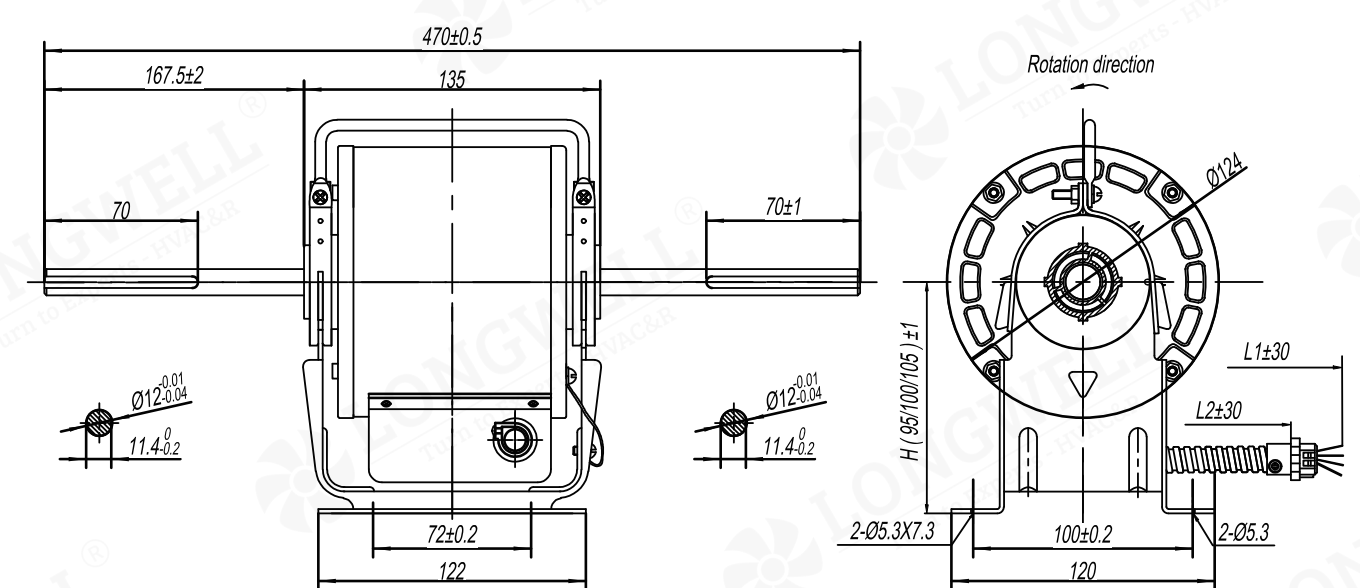

130mm Air Conditioner Motor-Single Shaft


Product Characteristic

- Housing Material: Aluminum
- Insulation Class: B/F
- Protection Class: IP54/55



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Nominal Output Power (W)	Pole	Bracket Height (mm)	Line Length (mm)	Tube Length (mm)
LWYDK300-4P-001	220	50	300	4	95	1000	900
LWYDK350-4P-001	220	50	350	4	95	1200	1100
LWYDK400-4P-001	220	50	400	4	95	1300	1200
LWYDK450-4P-001	220	50	450	4	95	1500	1400
LWYDK500-4P-001	220	50	500	4	95	1500	1400
LWYDK750-4P-001	220	50	750	4	95	1800	1700

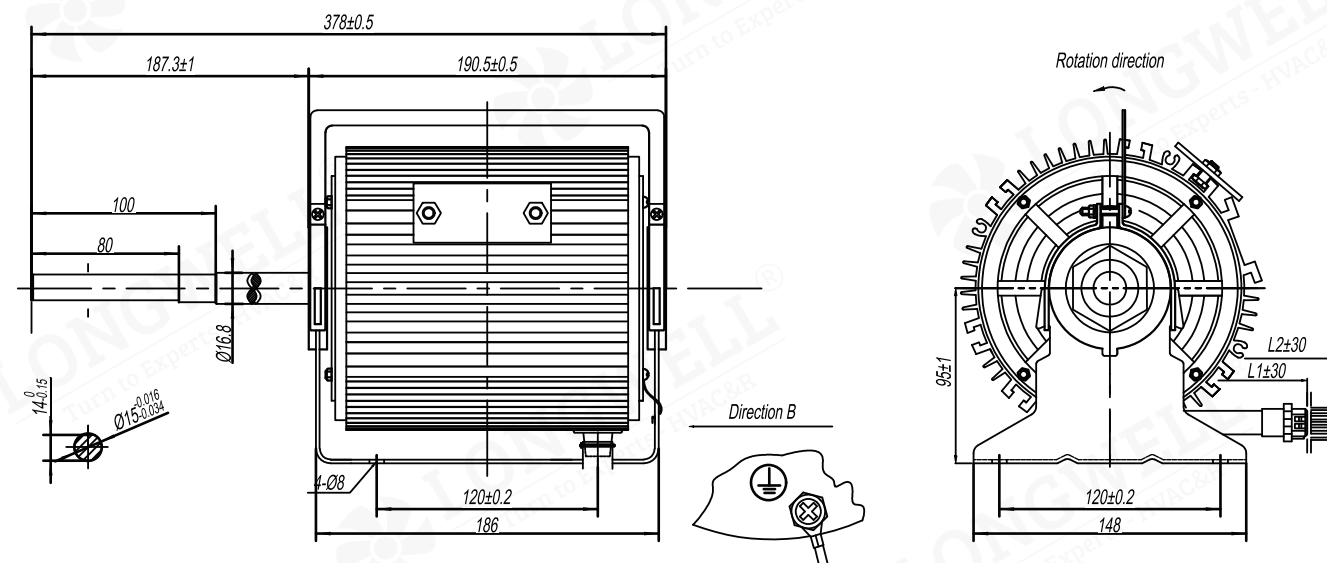

130mm Air Conditioner Motor-Double Shaft


Product Characteristic

- Housing Material: Aluminum
- Insulation Class: B/F
- Protection Class: IP54/55



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Nominal Output Power (W)	Pole	Bracket Height (mm)	Line Length (mm)	Tube Length (mm)
LWYSK300-4P-001	220	50	300	4	95	1000	900
LWYSK350-4P-001	220	50	350	4	95	1200	1100
LWYSK400-4P-001	220	50	400	4	95	1300	1200
LWYSK450-4P-001	220	50	450	4	95	1500	1400
LWYSK500-4P-001	220	50	500	4	95	1500	1400
LWYSK750-4P-001	220	50	750	4	95	1800	1700

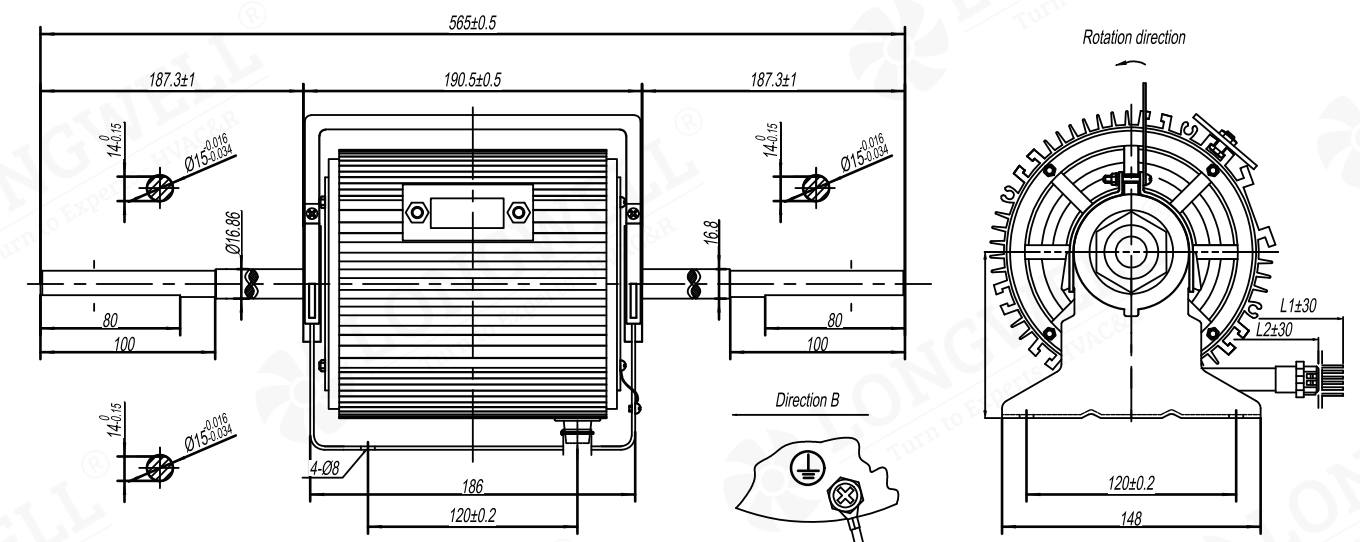

EC110 Air Conditioner Motor-Double Shaft




Product Characteristic

- | | |
|---------------------|------------------|
| ● Housing Material: | Galvanized Sheet |
| ● Insulation Class: | B/F |
| ● Protection Class: | IP20/44 |



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Nominal Output Power (W)	Pole	Bracket Height (mm)	Line Length (mm)	Tube Length (mm)
LWBLSK200-8P-001	220-240	50/60	200	8	95/100/105	1500	1400

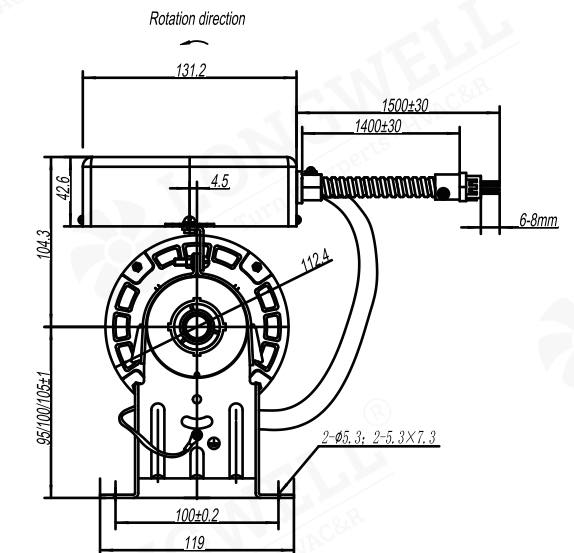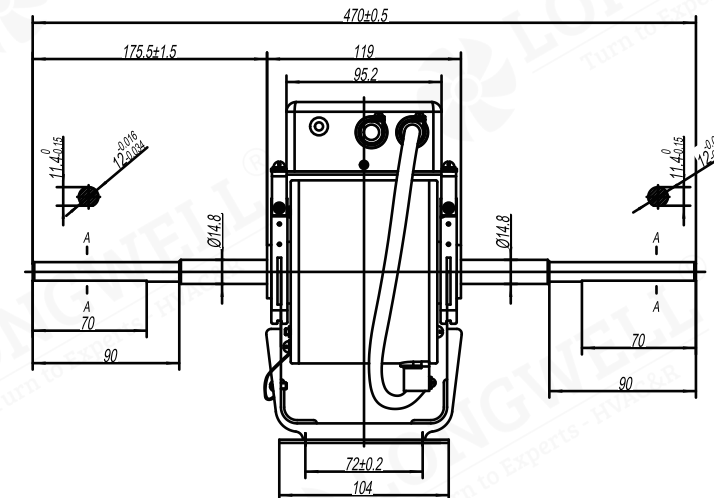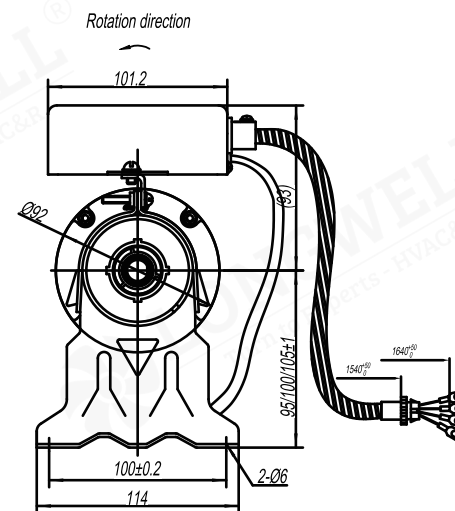

Infrared Remote Control Panel Instructions



① The first line value:

H represents high level, M represents medium level, L represents low level; 49 represents the model number.

② The second line value:

In three-speed mode, 9.50V represents the speed control voltage value for the current gear, which is adjustable;
In three-speed constant speed mode, the value displayed is the rotational speed, adjustable between 300-1500.

③ Third line icons:

(selected via the hidden key)The fan symbol represents the selectable load size;T represents torque mode, V represents speed mode (this function is only available in stepless speed control on Model 50);The three arrows represent the selectable rotation direction.

④ Value Increase Key:

When the remote control is in idle mode (only two digits are displayed on the screen), it is used to select the model number. When the remote control is in operation, it is used to adjust the voltage value or rotational speed value.

⑤ Background Light Key:

Press once to turn on the backlight, and press again to turn it off.

⑥ LCD Screen:

Background lighting is optional.

⑦ Refresh Key (Valid in Three-Speed Mode):

While the remote control is in operation, pressing this key will send all the adjusted values of each speed level to the drive unit. After receiving the data, the drive unit stores it simultaneously. At this point, the motor stops rotating and, after approximately 8 seconds, automatically restarts.

⑧ Gear Shift Key (Valid in Three-Speed Mode):

While the system is running, each press of this key will cycle through the gears in sequence according to the order: H → M → L → H (High → Medium → Low → High).

⑨ Value Decrease Key:

Its functions are similar to those of the increase key.

⑩ Power On/Off Key:

Press briefly to start the remote control and enter operation mode.

Press and hold for more than 2 seconds to access the model selection interface, placing the remote control in idle mode.