


Delivery Premium Quality Fans Globally for Healthier Breathing

World's Largest Selection of Fan Products
World's Most Comprehensive Fan Solutions

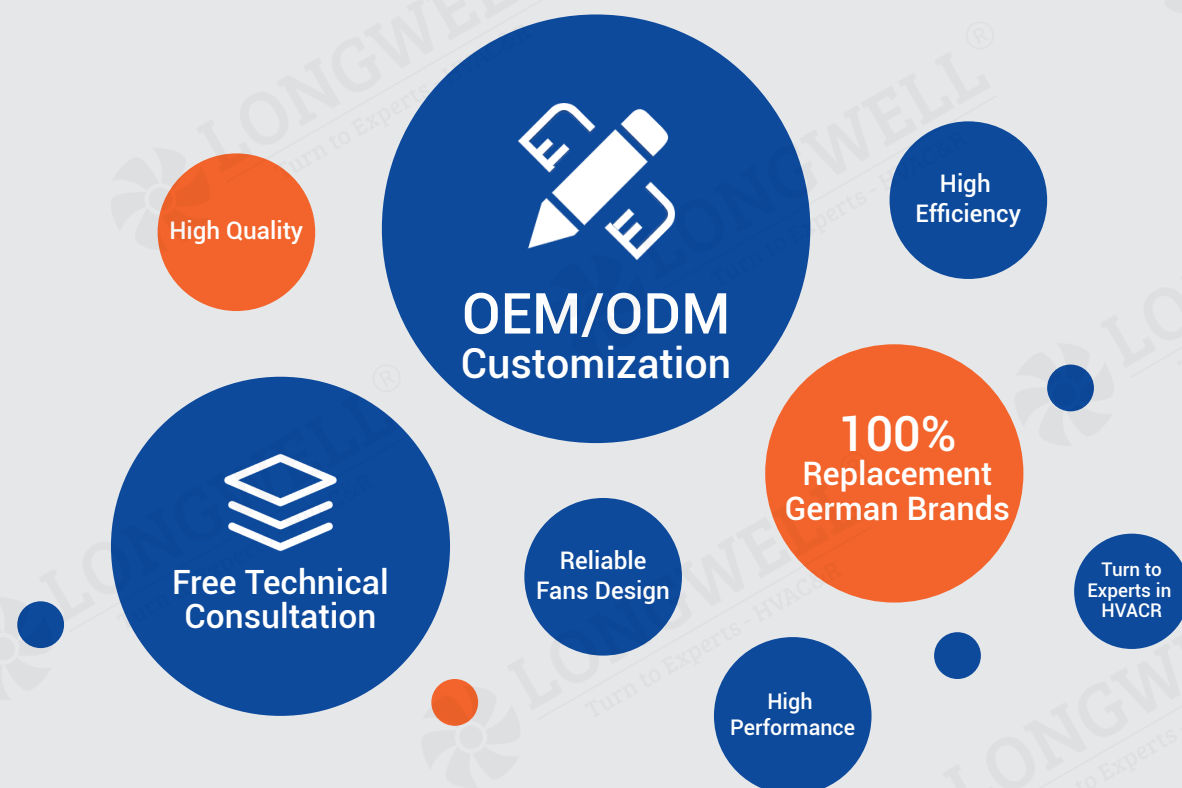

Ningbo Longwell Electric Technology Co., Ltd

Headquarter: NO.100, South of Xuxiang River, Yuyao, Zhejiang Province, China 315400

Tell: +86 574 6218 9863

Fax: +86 574 6218 9863

Phone: 0086 183 5827 4663

Web: www.longwellfans.com | www.longwell-group.com | www.longwell-media.com

Email: sales@zjlongwell.com



LONGWELL TECHNOLOGY

"Born for High-Quality Breathing
LONGWELL Fans Power Your Equipments"



**Professional Manufacturer of
HVACR Fan & Motors**

—— LWYL Series Two-value Capacitor Single
Phase Asynchronous Motor

Longwell Group

Longwell-China
Longwell-USA
Longwell-Russia
Longwell-Europe

About Longwell

Born for High-Quality Breathing, LONGWELL Fans Power Your Equipment

OEM for Well-Known Brands

Supplies Fortune 500 Companies

Global Technical Support

LONGWELL is a leading fan manufacturer, specializing in high-quality fans, blowers, motors, and components for heating, ventilation, air conditioning, and refrigeration applications. We have a strong presence in delivery capabilities, design and R&D capabilities, as well as manufacturing, placing us at the forefront of the industry.

Our product range includes EC/DC/AC centrifugal fans, axial fans, AC/BLDC cross-flow fans, single/double forward curved fans, AC/BLDC/ECM motors, and industrial fan blowers. Since our establishment in 1990, we have continuously upgraded our facilities and production capacity, boasting advanced testing labs and production facilities with an annual capacity of millions of fans. With over 20 years of experience, we are highly skilled in the design, development, and manufacture of fans and motors. We export to over 30 countries and serve numerous Fortune 500 clients.

Our facilities and products are compliant with certifications such as ISO9001, ISO14001, BSCI, CE, UL/ETL, CCC, EMC, and LVD. These certifications demonstrate our compliance in quality management, environmental management, social responsibility, and product safety. We are quality-oriented and dedicated to providing products and services that meet international standards. 

Equipped with advanced testing labs and production facilities, including a B&K noise lab, CFD simulation lab, air dynamics test chambers, automatic welding machines, CNC machining centers, and auto robot injection machines, we ensure efficient production and on-time delivery.

As industry leaders, we prioritize technological innovation and efficiency. We employ advanced technologies such as aerodynamics principles and CFD simulation to ensure precise and efficient fan designs. Additionally, we offer customized services to design and manufacture fan systems according to specific customer requirements. Our focus is on providing high-tech, high-efficiency products that meet our customers' needs and contribute to a better future.

At LONGWELL, innovation is at the core of our operations, driving continuous improvement. With our extensive experience and expertise, we can quickly customize solutions that meet customer needs. We emphasize technological sophistication, utilizing advanced technologies and high-performance materials to deliver products that are efficient, safe, and reliable. Our brand is widely recognized globally, and we are committed to promoting sustainable development and advancing the efficient fan industry.

LONGWELL looks forward to collaborating with you and providing high-quality customized fan and motor solutions. Please feel free to contact us as we work together to create a brighter future.

193

Staff

40000m²

Floor Space

500⁺

Branding Clients

1Million⁺ PCS

Annual Outputs

6

Overseas Offices
on Spot Support

50⁺

Members
R&D Team




B&K Noise Testing Lab



Production Line



Automatic Welding

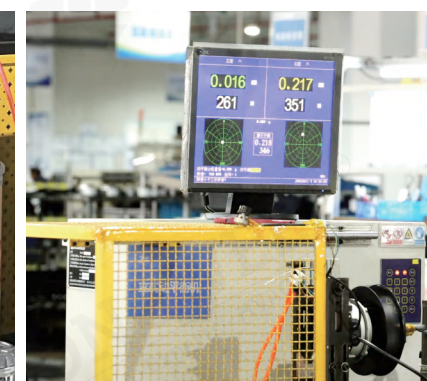

Balance Machine



Automatic Welding Machine



Production Line - Centrifugal Fan



Automatic CNC Machine



Air Dynamic Test Lab



Production Line - Axial Fans






Production Line

Testing and Standards


- ISO GB/T 19001-2016 idt ISO 9001:2015/GB/T 24001-2016 idt ISO 14001:2015/GB/T 45001-2020 idt ISO 45001:2018
- UL 507:2017 Ed.10+R:27/CSA C22.2#113:2018 Ed.11
- BSCI ANSI C63.4:2014/ANSI C63.4a-2017
- EN IEC 55014-1:2021/EN IEC 55014-2:2021/EN IEC 61000-3-2:2019 +A1:2021
EN 61000-3-3:2013 +A1:2019 +A2:2021 +AC:2022-01
EN 60335-2-80:2003 +A1:2004 +A2:2009;
EN 60335-1:2012 +A1:2014 +A13:2017 +A1:2019+A14:2019 +A2:2019+A15:2021
EN 62321-1:2013/EN 62321-2:2014/EN 62321-3-1:2014
EN 62321-4:2014+A1:2017/EN 62321-5:2014/EN 62321-6:2015
EN 62321-7-1:2015/EN 62321-7-2:2017/EN 62321-8:2017



Enterprise Credit Evaluation Certificate - Highest Level in China

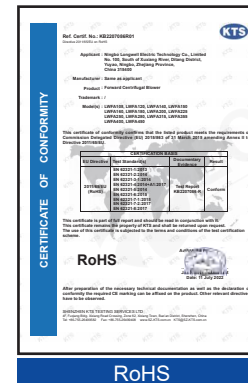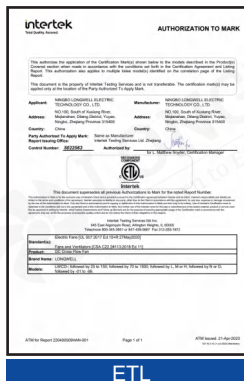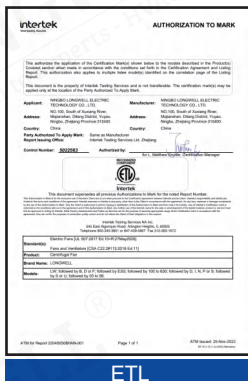

RoHS

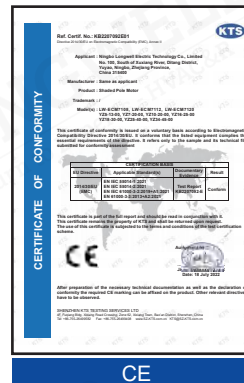


CE




CE




CE

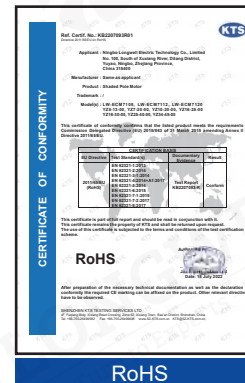


RoHS

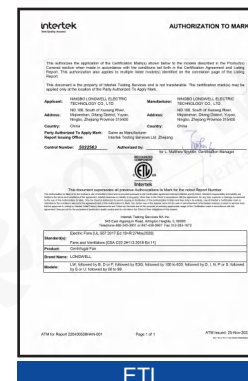

ETL

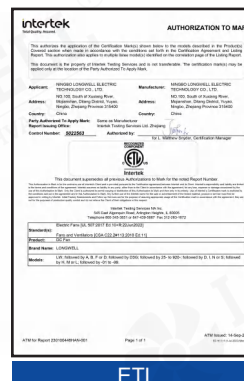

ETL

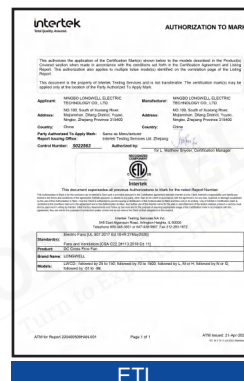

ETL



CE



CE



ISO 9001




ISO 9001




RoHS




RoHS

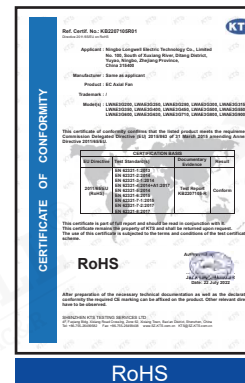

RoHS

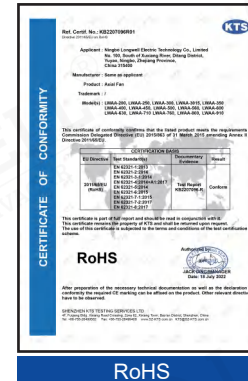

RoHS

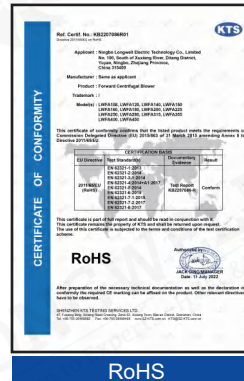

RoHS



CE




CE



CE

LWYL Series Two-value Capacitor Single Phase Asynchronous Motor

Professional HVAC Fan & Motors Manufacturer

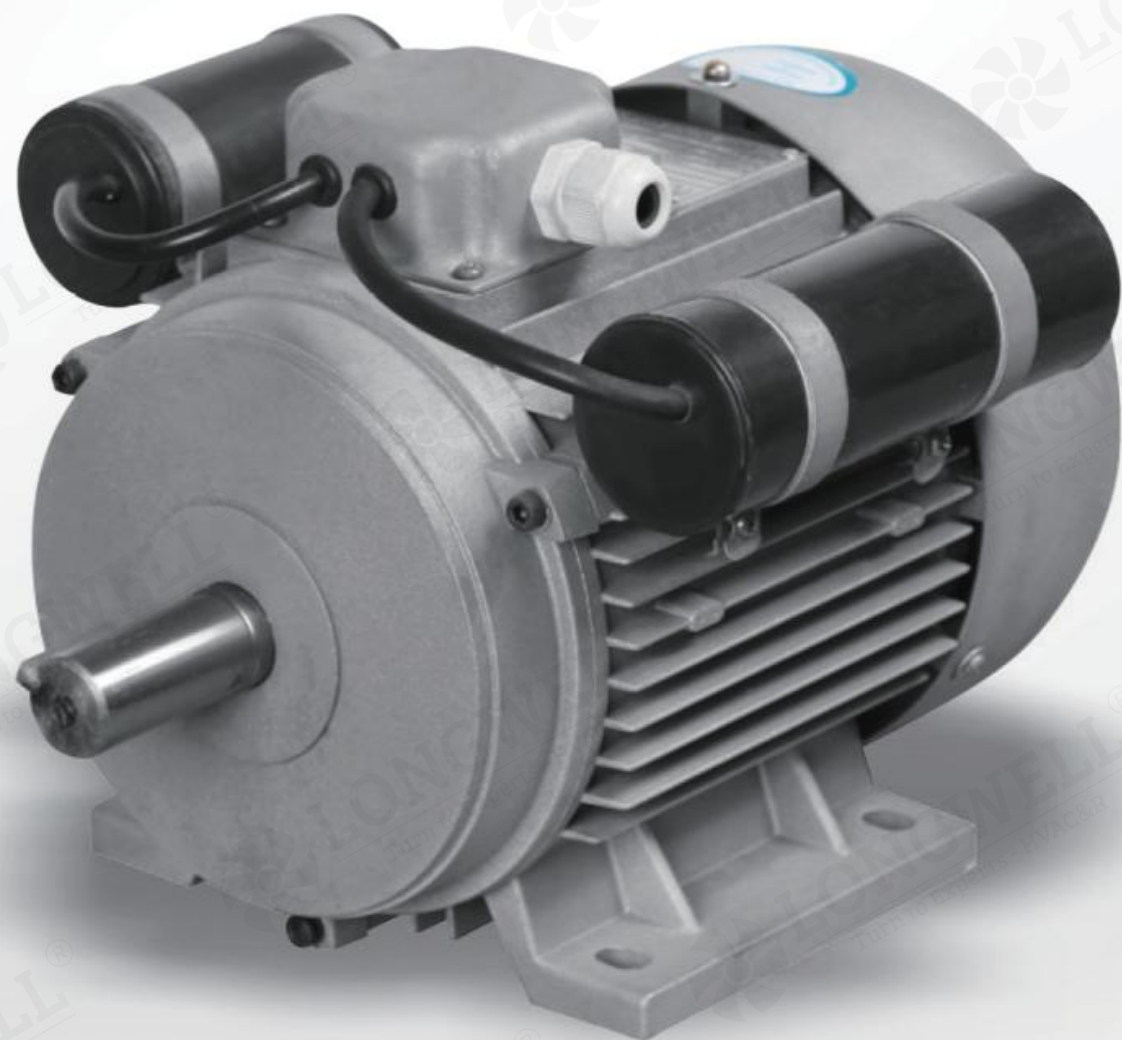

Type Code

LW YL 112M - 4 - 001

Series Number

Poles

Centre Height of Frame Size

Two-value Capacitor Single Phase
Asynchronous Motor

Longwell

LWYL Series Two-value Capacitor Single Phase Asynchronous Motor

Product Overview

LWYL series motor is designed and manufactured according to JB/T 9542 national standard. It has many advantages such as good starting and running performance, low noise, small vibration, compact structure, light weight and easy maintenance. It's widely used as power equipment in air compressor, water pump, family workshop and so on.

Technical Parameters

Centre Height of Frame Size: 71-112mm

Power Range: 0.25-3.7kw

Rated Voltage: 220V(special should order)

Rated Frequency: 50Hz(or 60Hz)


Protection Class: IP44

Insulation Class: B **Duty Type:** S1

Technical Data

Model	Rated power(KW)	Rated current(A)	Rated Speed(r/min)	Efficiency (η%)	Power Factor (cosΦ)	Locked-rotor torque Rated torque(Tst/TN)	Locked-rotor current(A)	Max. torque/Rated torque(Tmax/TN)	Min. torque/Rated torque(Tmin/TN)
LWYL7112-001	370	2.73	2800	67	0.92	1.8	16	1.7	1.0
LWYL7122-001	550	3.88	2800	70	0.92	1.8	21	1.7	1.0
LWYL8012-001	750	5.15	2800	72	0.92	1.8	29	1.7	1.0
LWYL8022-001	1100	6.85	2800	75	0.95	1.8	40	1.7	1.0
LWYL90S-2-001	1500	9.44	2800	76	0.95	1.8	55	1.7	1.0
LWYL90L-2-001	2200	13.67	2800	77	0.95	1.7	80	1.7	1.0
LWYL100L1-2-001	3000	18.2	2900	79	0.95	1.7	110	1.7	1.0
LWYL112M-2-001	3700	21.9	2900	81	0.95	1.7	135	1.7	1.0
LWYL7114-001	250	2.03	1400	62	0.92	1.8	12	1.7	1.0
LWYL7124-001	370	2.81	1400	65	0.92	1.8	16	1.7	1.0
LWYL8014-001	550	3.88	1400	68	0.92	1.8	21	1.7	1.0
LWYL8024-001	750	5.22	1400	71	0.92	1.8	29	1.7	1.0
LWYL90S-4-001	1100	7.32	1400	73	0.95	1.7	40	1.7	1.0
LWYL90L-4-001	1500	9.57	1400	75	0.95	1.7	55	1.7	1.0
LWYL100L1-4-001	2200	13.9	1400	76	0.95	1.7	80	1.7	1.0
LWYL100L2-4-001	3000	18.6	1400	77	0.95	1.7	110	1.7	1.0
LWYL112M-4-001	3700	22.4	1400	79	0.95	1.7	135	1.7	1.0

Outline and Mounting Dimensions of LWYL Series Two-value Capacitor Single Phase Asynchronous Motor

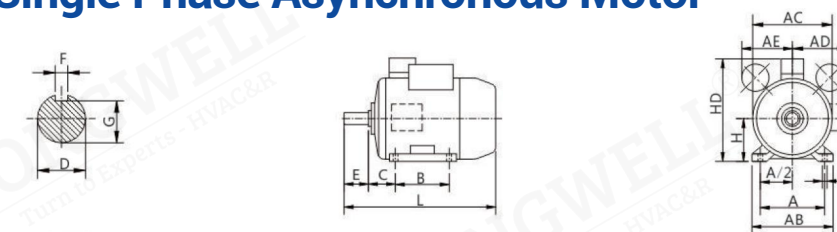


Electric motor with foot-mounted frame and no flange on the end shield

unit: mm

Frame	A	A/2 ^a	B	C	D	E	F	G	H	K	AB	AC	AD	AE	HD	L
71	112	56	90	45	14	30	5	11	71	7	145	145	140	105	180	255
80	125	62.5	100	50	19	40	6	15.5	80	10	160	165	150	120	200	295
90S	140	70	100	56	24	50	8	20	90	10	180	185	160	130	240	370
90L	140	70	125	56	24	50	8	20	90	10	180	185	160	130	240	400
100L	160	80	140	63	28	60	8	24	100	12	205	220	180	140	260	430
112M	190	95	140	70	28	60	8	24	112	12	245	250	190	140	300	455

a. When the foot hole K is an elongated (slotted) hole or the positional tolerance is acceptable, A/2 is not considered

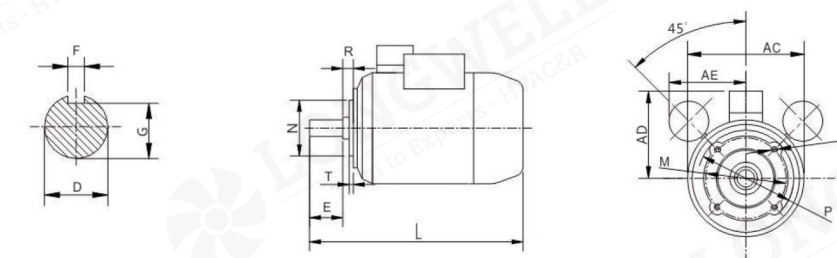


Electric motor with a footless frame and a small flanged end shield (with threaded holes)

unit: mm

Frame	Flange Size	D	E	F	G	M	N	P	R ^a	S	T	AC	AD	AE	L
71	FF85	14	30	5	11	85	70	105	0	M6	2.5	145	140	105	255
80	FF100	19	40	6	15.5	100	80	120	0	M6	3.0	165	150	120	295
90S	FF115	24	50	8	20	115	95	140	0	M8	3.0	185	160	130	370
90L	FF115	24	50	8	20	115	95	140	0	M8	3.0	185	160	130	400

a. R is the distance from the flange mating surface to the shaft extension shoulder

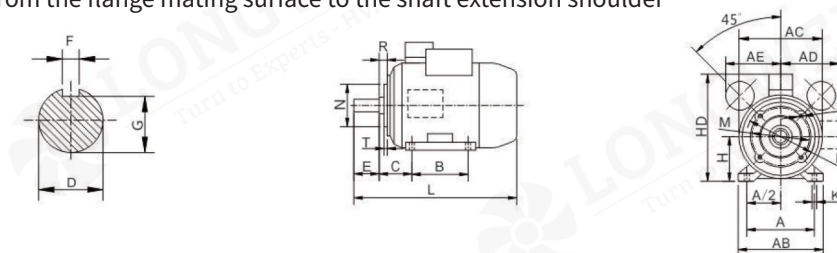


Electric motor with foot-mounted frame and a small flanged end shield (with threaded holes)

unit: mm

Frame	Flange Size	A	A/2 ^a	B	C	D	E	F	G	H	K	M	N	P	R ^b	S	T	AB	AC	AD	AE	HD	L
71	FF85	112	56	90	45	14	30	5	11	71	7	85	70	105	0	M6	2.5	145	145	140	105	180	255
80	FF100	125	62.5	100	50	19	40	6	15.5	80	10	100	80	120	0	M6	3.0	160	165	150	120	200	295
90S	FF115	140	70	100	56	24	50	8	20	90	10	115	95	140	0	M8	3.0	180	185	160	130	240	370
90L	FF115	140	70	125	56	24	50	8	20	90	10	115	95	140	0	M8	3.0	180	185	160	130	240	400

a. When the foot hole K is an elongated (slotted) hole or the positional tolerance is acceptable, A/2 is not considered
b. R is the distance from the flange mating surface to the shaft extension shoulder

Outline and Mounting Dimensions of LWYL Series Two-value Capacitor Single Phase Asynchronous Motor

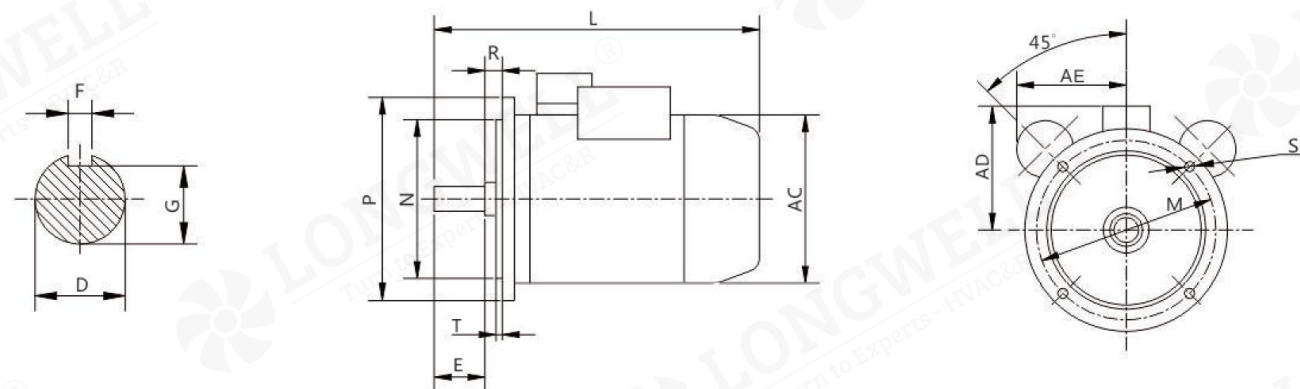


Electric motor with a footless frame and a large flanged end shield (with through holes)

unit: mm

Frame	Flange Size	Mounting Dimension											Flgure Size			
		D	E	F	G	M	N	P	R ^a	S	T	AC	AD	AE	L	
71	FF130	14	30	5	11	130	110	160	0	10	3.5	145	140	105	275	
80	FF165	19	40	6	15.5	165	130	200	0	12	3.5	165	150	120	300	
90S	FF165	24	50	8	20	165	130	200	0	12	3.5	185	160	130	370	
90L	FF165	24	50	8	20	165	130	200	0	12	3.5	185	160	130	400	
100L	FF215	28	60	8	24	215	180	250	0	15	4.0	220	180	140	430	
112M	FF215	28	60	8	24	215	180	250	0	15	4.0	250	190	140	455	

a. R is the distance from the flange mating surface to the shaft extension shoulder

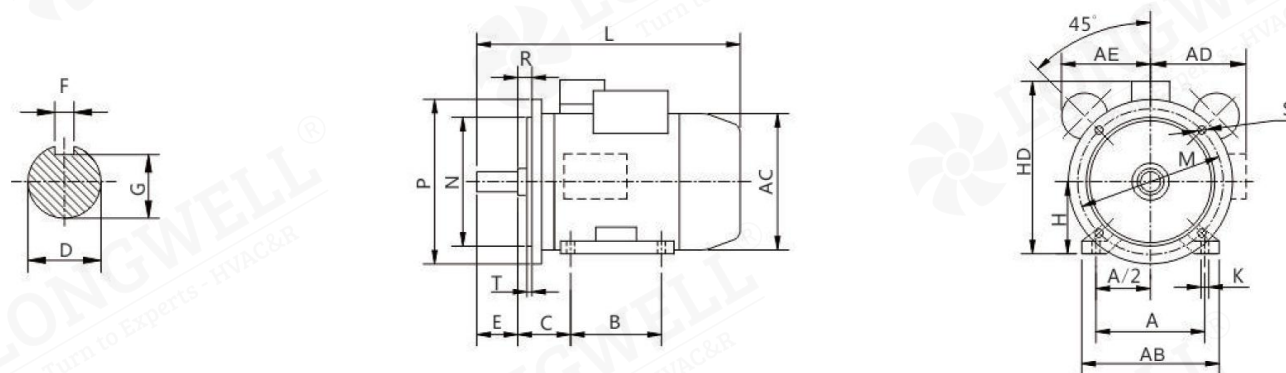

Electric motor with foot-mounted frame and a large flanged end shield (with through holes)

unit: mm

Frame	Flange Size	A	A/2 ^a	B	C	D	E	F	G	H	K	M	N	P	R ^b	S	T	AB	AC	AD	AE	HD	L
90S	FF165	140	70	100	56	24	50	8	20	90	10	165	130	200	0	12	3.5	180	185	160	130	240	370
90L	FF165	140	70	125	56	24	50	8	20	90	10	165	130	200	0	12	3.5	180	185	160	130	240	400
100L	FF215	160	80	140	63	28	60	8	24	-	12	215	180	250	0	15	4.0	205	220	180	140	260	430
112M	FF215	190	95	140	70	28	60	8	24	-	12	215	180	250	0	15	4.0	245	250	190	140	300	455

a. When the foot hole K is an elongated (slotted) hole or the positional tolerance is acceptable, A/2 is not considered

b. R is the distance from the flange mating surface to the shaft extension shoulder